


GoWire™ SMART Board™ Software Auto-launch Cable

Specifications – USB-GW

Physical Specifications

Length	7' (2.1 m)
Weight	4 oz. (111.0 g)
Shipping Size	9 1/4" W × 6 1/2" H × 2" D (23.5 cm × 16.6 cm × 5.0 cm)
Shipping Weight	6 1/2 oz. (189.0 g)

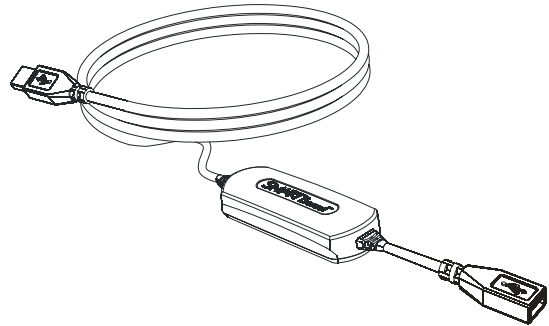

Standard Features

Software

The GoWire™ cable contains SMART Board™ software and launches it automatically, providing full access to all software tools. GoWire cable software upgrades are available at www2.smarttech.com/st/en-US/Support/Downloads/SBS/SBSv95GoWire.htm.

Connectors

USB A receptacle provides a connection to a peripheral device, such as a SMART Board interactive whiteboard

USB A plug connects to a USB 1.1 or 2.0 receptacle on the host computer

Certifications

FCC, CE, VCCI

Storage and Operating Specifications

Storage	-40°F to 104°F (-40°C to 40°C)
Operating	32°F to 104°F (0°C to 40°C), up to 95% humidity (non condensing)

SMART Board Software 9.7 Computer Requirements

Windows® Computers

Pentium® II 450 MHz processor
256 MB of RAM (512 MB recommended)
150 MB of free hard disk space for minimum installation (840 MB for full installation with Gallery collections)
Windows 2000, Windows XP or Windows Vista™ operating system
Internet Explorer® internet browser 6.0 or later
Adobe® Flash® player version 8

Requirements for SMART Video Player

Pentium II 450 MHz processor (700 MHz or faster recommended)
Windows 2000 operating system or later
Microsoft® DirectX® technology 8.1 or later

Mac Computers


700 MHz processor (1 GHz or faster recommended) PowerPC® G3, G4 or G5 processors and Intel® processors (universal binary)
256 MB of RAM (512 MB recommended)
85 MB of free hard disk space for minimum installation (825 MB for full installation with Gallery collections)
Mac OS X version 10.4.x operating system software
Safari application program version 1.3.2 or later

Specifications – Model USB-GW

Linux® Computers

Pentium II 450 MHz processor
128 MB of RAM (256 MB recommended)
225 MB of free hard disk space for minimum installation (800 MB for full installation with Gallery collections)
Linux kernel version 2.6 or later
X Window System™ version 11 release 6 (X11R6) or later (must support XRender, Xinerama™, XFixes, Xau and Xdmcp)
glibc 2.3.3 (gcc 3.4.2)
libstdc++6
GNOME™ 2.8.0+ or KDE® 3.3+ libraries (recommended)
SUSE™ 10, Red Hat® Enterprise Linux 4 WS, Debian® 3.1 (Sarge), Ubuntu® 6.06 LTS or Fedora™ Core 3+

Dimensions

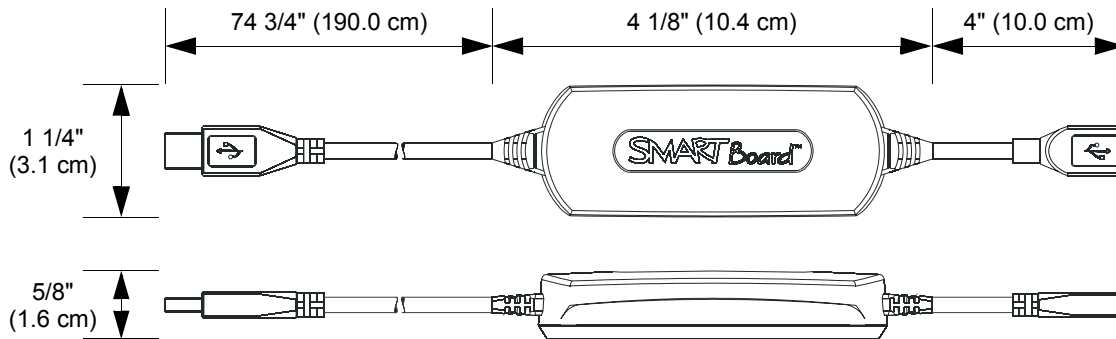

SMART Order Number

USB-GW

GoWire SMART Board software auto-launch cable

SMART Technologies

1207 – 11 Avenue SW, Suite 300

Calgary, AB T3C 0M5

CANADA

Phone +1.403.245.0333

Toll Free 1.888.42.SMART (Canada/U.S.)

info@smarttech.com www.smarttech.com

SMART
Technologies